


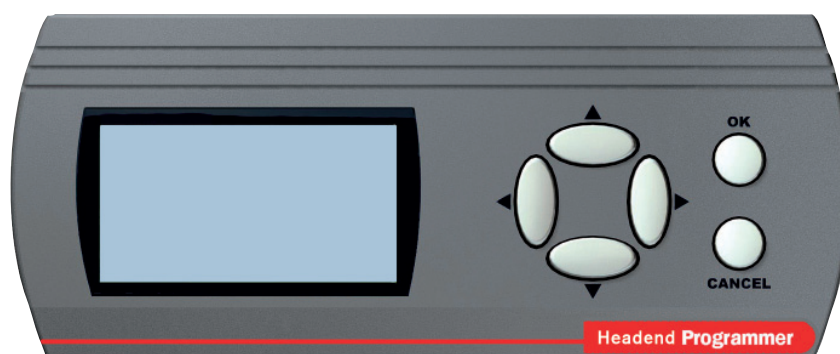

Technical features PRO 300

Reference	PRO 300
Code	2003127
Protocol	I2C / RS232
Display	128 x 64 pixel Graphic LCD
Size	170 x 70 x 32 mm
Connector	DB9 male, RJ45
Memory card	SD (FAT 16 Format)
Memory card max. capacity	2 GB
Programmable devices	Genius 5, Genius 6, Genius 10, Genius ICT DVB 310 S, DVB 310 S CI, DVB 310 T, DVB 310 T CI, TKQ 310, TSQ 310, TSQ 310 CI, TKF 310, TSF 310, TSF 310 CI, TWSF 310 CI, TFF 310, TFF 310 CI, ETWF 310, MTW 310 DVB 300 *, DVB 300 CI *, DVB 300 T * MTW 300, TVC 300, TVC 200, PFI 200, FCP 200 U
Feeding	12-18 V
Consumption	- 32 mA with display backlight ON - 24 mA with display backlight OFF

* Only for upgrading and saving module configurations. DC injector is required to feed the programmer.