


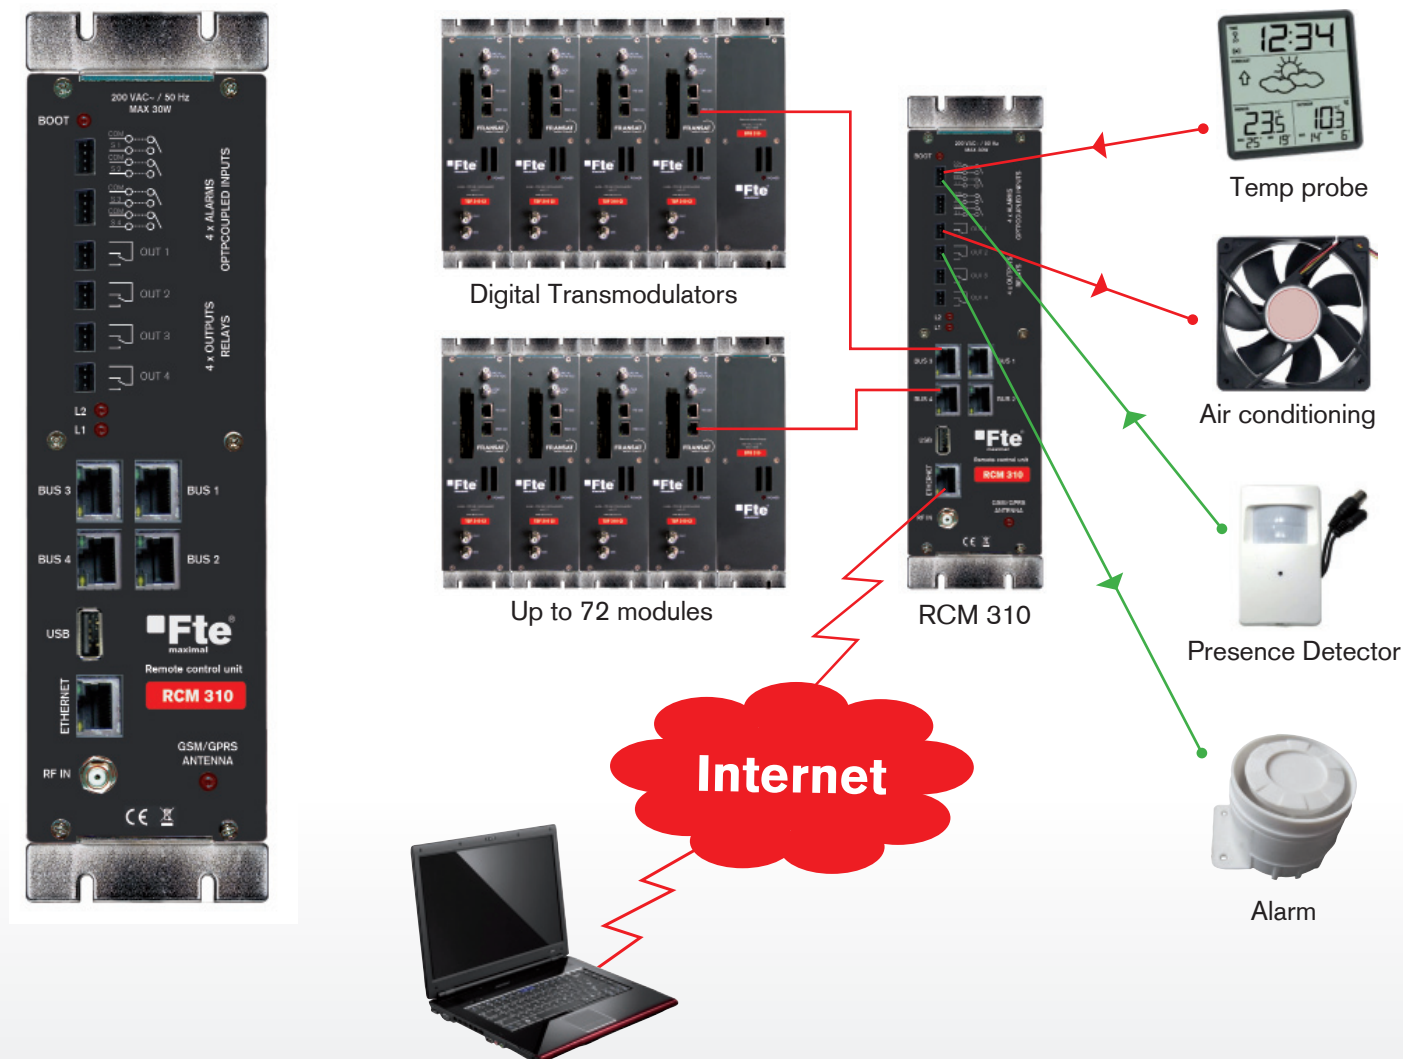

Fonctions

- ✓ **Telecontrol:** Remote programming through Internet
- ✓ **Remote uprading**
- ✓ **Monitoring:** Input / Output levels, Signal Quality...
- ✓ **Notifications:** Alarms through eMail or SMS
- ✓ **Inputs / Outputs:** 4 connections for sensors and 4 connections for activators.

Item	RCM 310
Code	2003560 / 2003560-R (Assembled in rack 19")
Input frequency margin	47-862 MHz
Input level	65 a 105 dBuV
Input impedance	75 Ohms
Measure precision	± 2 dB
Digital inputs	4 (contact inputs, 0 Vdc máx)
Relay inputs	4 (3A, 250VAC Max)
Modem	GSM / GPRS tribanda 900/1800/1900 MHz
DVBUS RJ45 Ports	4
USB	2.0 High speed Host
Maximum number of DVBUS devices	18 modules per port. 72 altogether
Program interface	Servidor Web
Processor	Freescale IMx25 ARM9 400 Mhz
Operating System	Linux 2.6
Inner Flash disc	Tarjeta SD 1 Gbytes
RAM	64 Mbytes
Running temperature	0°C-45°C
Supply	230VAC ± 10%
Maximum consumption 220V (W)	10 W
Size	75 x 265 x 150 mm
Weight	1,5 Kg