


Fte[®] MAX S102 E

maximal

Digital Satellite Receiver
PVR Ready
FTA

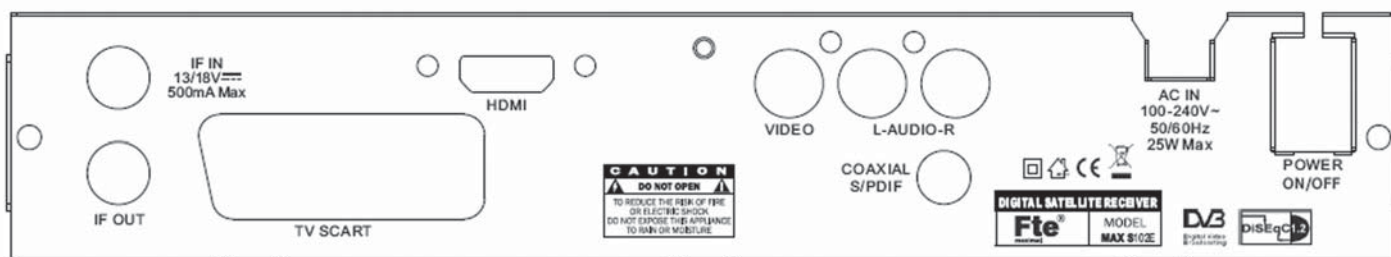

Technical features MAX S102 E

Sleep Timer	HDMI Connection	USB 2.0 (PVR Ready)
FTA channels	1 Scart	DiSEqC 1.2
Multi-language OSD + display	3 X RCA AV	JPEG on screen photos
Electronic Program Guide (EPG)	OTA: Software upgrade via satellite	Time Shifting function*
4000 channels	SDX: SatcoDX compatible	MP3 music player
Teletext	SPDIF: Coaxial Digital Audio Output	Picture in Picture

* Function available with USB connected

Commercial and logistic information

Measures: 240 x 190 x 45 mm

Code: 0720040

EAN Code: 8436023595803

Weight: 1,1 kg

Packaging: 6 pcs

MAX S102 E

FTA channels
1 SCART
HDMI, SPDIF
USB 2.0
Picture in Picture
JPEG & MP3 player



BCN Distribuciones, S.A.U.

Mogoda, 110
Pol. Industrial Can Salvatella
08210 Barberà del Vallès (Barcelona)
Tel. +34 93 729 27 00 / Fax +34 93 729 30 73



www.ftemaximal.com

Digital Satellite Receiver PVR Ready MAX S102E

VÍDEO	
Decoding Bit rate Output Aspect ratio Active pixel Output connector	MPEG-2 & MPEG-1 compatible Max 15Mbps PAL/NTSC 4:3, 16:9, Auto 720x480 @ 30fps; 720x576 @25fps Scart / HDMI / RCA
AUDIO	
Decoding Mode Bit rate Output connector	MPEG-2/MPEG-1 layer I & II Mono, Dual, Stereo, Joint stereo Max 384Kbps Scart / HDMI / RCA / S/PDIF
DEMODULATOR	
Demodulation Symbol rate Outer code Inner code Energy dispersion	QPSK SCPC/MCPC RS (204, 188, 8) ALL DVB rates DVB-S recommendation
INPUT SIGNAL	
Frequency Input level Channel bandwidth Input socket	950MHz ~ 2150MHz -65dBm ~ -25dBm 36MHz F-type connector
LNB CONTROL	
Power supply Polarized control DiSEqC control	13/18V (500mA max) with short circuit protection 13/18V polarization (vertical/horizontal) DiSEqC1.0 DiSEqC1.1 and DiSEqC 1.2
MISCELLANEOUS	
Supply voltage Power consumption Operation temperature Dimension Weight	100~240VAC 50~60 Hz Typ. 21 watts / Máx. 25 watt +5°C a +40°C 240x190x45 mm 1,1Kg

