


PC-6-F-MT-**xx**GY

Patch cord Cat. 6 FTP

xx: meters

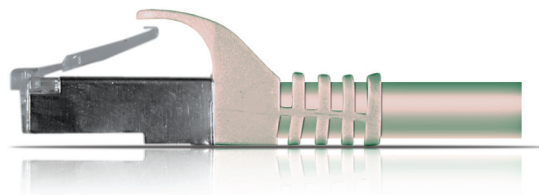

PC-6-F-MT-**xx**GY

Technical specifications. Patch cord Cat. 6 FTP PC-6-F-MT-**xx**GY

	PC-6-U-MT-0.5GY	PC-6-U-MT-1GY	PC-6-U-MT-1.5GY	PC-6-U-MT-2GY	PC-6-U-MT-3GY	PC-6-U-MT-5GY	PC-6-U-MT-10GY
Code	2220150	2220152	2220153	2220154	2220156	2220158	2220192
Description	Patch cord F/UTP Cat. 6 Cu LSZH RJ45/u - RJ45/u						
Category	6						
Cable type	F/UTP						
Pair shielding	No						
Overall shielding	Aluminum foil						
Conductors per fiber	4 pairs						
Conductor material	Cu (cobre)						
Conductor diameter	AWG26						
Conductor type	Stranded						
Jacket material	LSZH (Zero-halogen, flame retardant)						
Jacket diameter (mm)	6,0						
Jacket colour	Light grey						
Connectors type	RJ45						
Connectors category	6						
Connectors shielding	Yes						
Lenght (m)	0,5	1	1,5	2	3	5	10
Standardization	ISO/IEC 11801 EN 50173 EN 50168 EIA/TIA 568A/B						
Packing quantity	1/50	1/35	1/20	1/15	1/10	1/7	1/10